



Nella Surface Mounted Downlight Installation Instructions

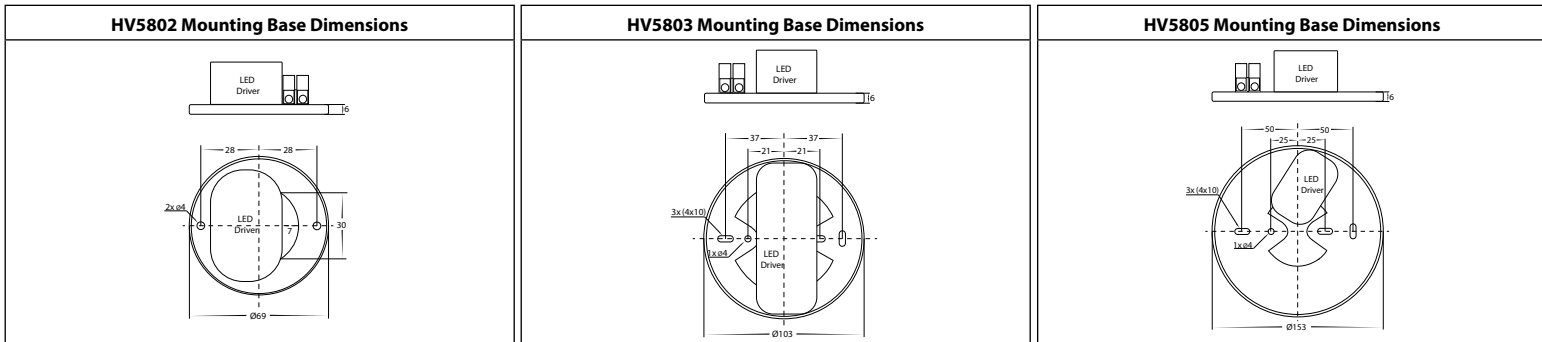

Product Specifications

Model No.	HV5802T-BLK	HV5802T-WHT	HV5803T-BLK	HV5803T-WHT	HV5805T-BLK	HV5805T-WHT
	HV5802T-BLK-EXT	HV5802T-WHT-EXT	HV5803T-BLK-EXT	HV5803T-WHT-EXT	HV5805T-BLK-EXT	HV5805T-WHT-EXT
Name	Nella					
Material	Aluminium					
Colour	Black	White	Black	White	Black	White
IP Rating	IP54					
Input Voltage	240v					
Protection Class	1 (Requires Earth) ⚠					
Lamp Base	Built in LED					
Lamp Wattage	1x 7w		1x 12w		1x 18w	
Colour Temp	TRI-Colour - 3000k, 4000k, 5500k		TRI-Colour - 3000k, 4000k, 5500k		TRI-Colour - 3000k, 4000k, 5500k	
Lumens	525lm, 560lm, 540lm		995lm, 1125lm, 1050lm		1380lm, 1430lm, 1305lm	
CRI	> 80					
Wiring	Parallel					
Dimmable	Yes - Triac Dimmable					
Warranty	3 Years Replacement*					

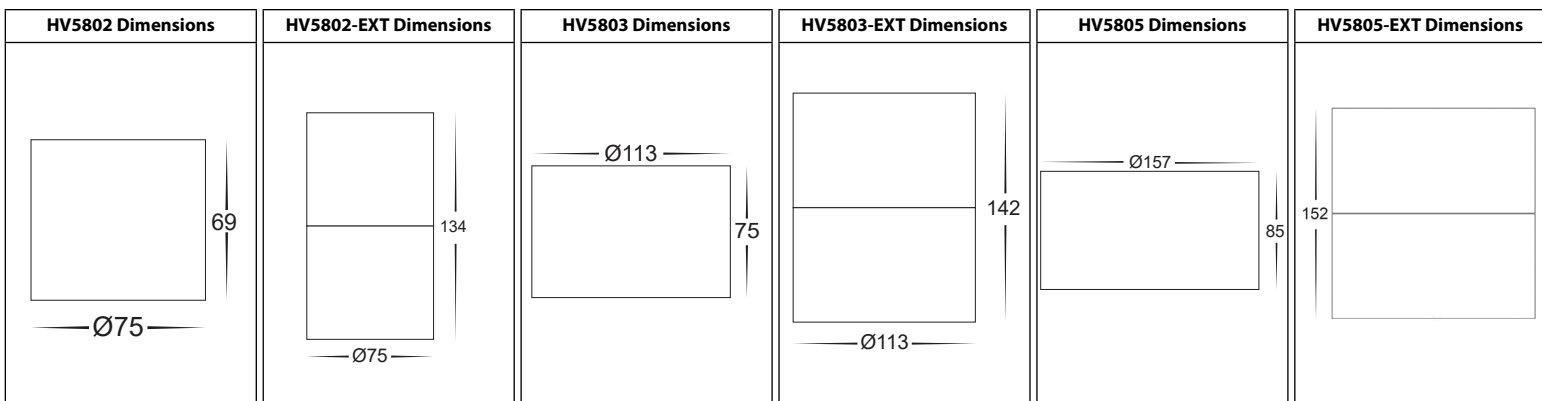

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Remove base plate by twisting anti clockwise.
3. Unplug fitting from driver and set fitting aside
4. Install base plate in desired location using appropriate screws for application. If fitting is installed in an outdoor environment, Seal must stay in place to keep fittings IP Rating.
5. Connect the cable: Use wire with earth, connect earth first then positive and then neutral
6. Reconnect plug from fitting to driver.
7. Fitting is preset to 3000k, To change slide switch inside fitting to desired colour temperature
8. Reattach fitting to base plate by twisting clockwise
9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

