

Fino LED Ceiling Light Installation Guide

We strongly recommend that you read this manual carefully before installation. Installation MUST be carried out by a qualified and licensed electrician.




Replacement
Warranty

Models Parameters:

MLFO34516WD	16W LED Ceiling Light 210mm White
MLFO34518WD	18W LED Ceiling Light 280mm White
MLFO34518WS	18W LED Ceiling Light 280mm with Microwave Motion Sensor White
MLFO34518MD	18W LED Ceiling Light 280mm Black
MLFO34524WD	24W LED Ceiling Light 350mm White
MLFO34524MD	24W LED Ceiling Light 350mm Black
MLFO34532WD	32W LED Ceiling Light 420mm White
MLFO34532MD	32W LED Ceiling Light 420mm Black
MLFO34538WD	38W LED Ceiling Light 500mm White

Part List:

1. Lamp cover
2. Light body
3. Colour temperature switch
4. Wall mount screws
5. Sealing ring
6. Insulation tube

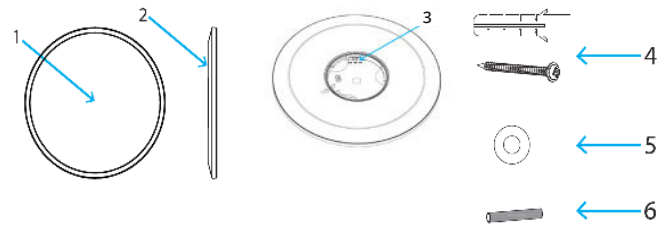

Installation Instructions

Step 1. Switch OFF the mains supply

Step 2. Rotate the wall mounting plate "A" from light body "B" counter-clockwise to unlock the safety lock "C" and unplug the terminal block "F".

Step 3. Use the wall mounting plate "A" as a template to drill three holes in the wall or ceiling, then place the dowel "D" into the holes.

Step 4. Feed mains supply through the insulation tube "I" and connect live "L" and neutral "N" wires to the terminal block "E".

Step 5. Use screws "G" and washer "H" provided to secure the wall mounting plate "A" onto a flat surface.

Step 6. Lock the safety lock "C" and plug the terminal block "F" back on. Rotate the light body "B" clockwise to refit back to the mounting plate "A". *NB: Ensure the fitting is firmly tightened to maintain IP rating.*


Step 7. Switch ON the mains supply and turn the oyster light on.

Fino LED Ceiling Lights Installation Guide


Data Table

Models	Power (W)	PF	CCT (K)	Weight (KG)	Operation Temperature (Degree)	IP
MLFO34516WD	16	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34518WD	18	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34518MD	18	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34518WS	18	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34524WD	24	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34524MD	24	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34532WD	32	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34524MD	32	≥0.9	3000 / 4000 / 5000		+40° -20°	54
MLFO34538WD	38	≥0.9	3000 / 4000 / 5000		+40° -20°	54

CCT (Colour Changable Temperature)

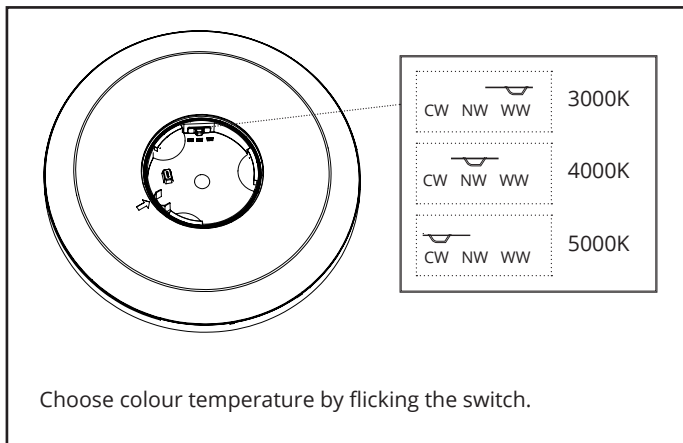

Sensor Setting (MLFO34518WS)

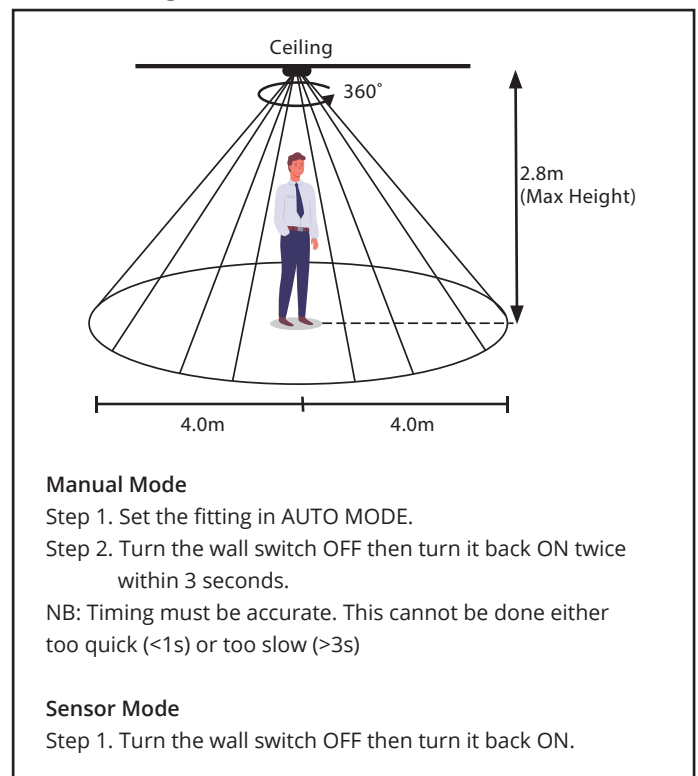

WARNING

- Installation of product **MUST** follow SAA standards and meet local authority regulations.
- Installation **MUST** be carried out by a qualified and licensed electrician.
- Light **MUST** be earthed.
- Light **MUST** be firmly installed to a flat solid surface, wall or ceiling.
- **DO NOT** immerse any part of the light fitting into water or any form of liquid.
- **DO NOT** look directly into the LED light.
- The warranty is **VOID** if product is not installed according to this installation guide.

5 Year Replacement Warranty

Visit our website for details <https://www.martecaustralia.com.au/warranty-statement/>

